

CABLE RETENTION



Nylon Cable Tie – Flat Head

These high strength Nylon Cable ties incorporate a low profile flat head, high surface area and a closing system with external teeth. They are particularly suitable for electrical applications, such as suspended lines, where there may be problems with insulation damage.

PERFORMANCE	Strength	
	Temperature	
	Speed	
	Weathering	
	Chemical	
Dynamic Range		

Applications

- Automotive
- Electrical Installations
- Industrial Wiring
- Outdoor Use
- Panel Building
- General Industry

Materials – see section 10.3

- Nylon 6.6.


On Request

- Nylon 12 – FHCT-D-510 & FHCT-D-760 only

Weathering	
Chemical	

HCL Part No	Max Bundle Diameter mm	Length (A) mm	Band Width (B) mm	Head Style	Tensile Strength kg	Box Quantity
FHCT-S-132	27	132	9.0	Single	39.8	100
FHCT-S-180	40	180				
FHCT-D-260	62	260				
FHCT-D-300	80	300		Double	55.1	
FHCT-D-360	93	360				
FHCT-D-510	140	510				
FHCT-D-760	220	760				

All weights, dimensions & quantities are subject to a 2.5% tolerance.
To add material selection to the HCL Part No: for Nylon 6.6, add “-PA66”.

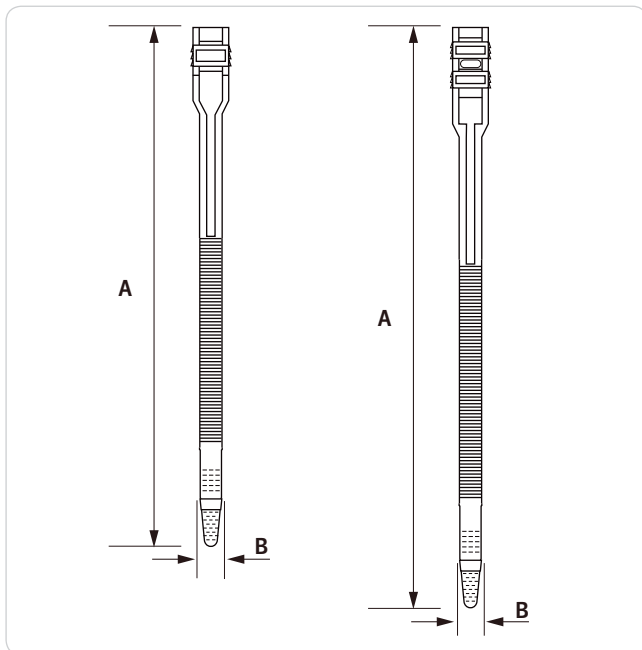

Installation Tools – see section 9.1



MT-PCT-03